



**AUTOMATIC
DOOR AND
HARDWARE**

www.autodoorandhardware.com

**COMMANDER INDUSTRIAL COMMERCIAL
AUTOMATIC DOOR OPEARTOR**

SURFACE APPLIED INSTALLATION

**SINGLE UNITS: LEFT HAND REVERSE, RIGHT HAND
REVERSE**

DUAL UNITS: LEFT HAND REVERSE-RIGHT HAND REVERSE

PROJECT INFORMATION

PROJECT NAME:


LOCATION:

DOOR

NUMBERS:

DATE: SHEET:

SHEET: 1 OF 1

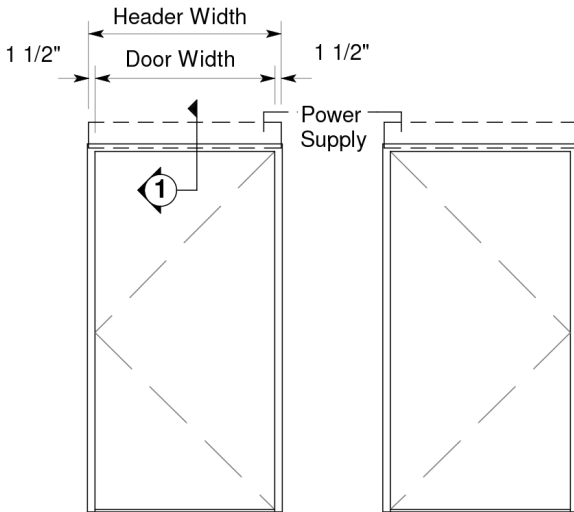

SURFACE APPLIED PACKAGES


SINGLE OPENERS	DUAL OPENERS
LHR OR RHR	LHR-RHR
FOR DOORS UP TO 48" WIDE & 96" TALL	FOR DOORS UP TO 96" WIDE & 96" TALL
FINISH: CLEAR ANODIZED	

INSTALLATION


•HEADER CASE TO BE MOUNTED TOP JAMB ON PUSH
SIDE OF DOOR FRAME

ACTIVATION

- PUSH AND GO FUNCTION STANDARD. CAN BE OPERATED WITHOUT
ACTIVATION SWITCHES.
- STANDARD INSTALLATION RECOMMENDED WITH PUSH TO OPEN
ACTIVATION SWITCHES OR TOUCH FREE ACTIVATION SWITCHES
- CAN BE INTEGRATED WITH SAFETY SENSORS
- CAN BE INTEGRATED WITH ELECTRIC STRIKES & ACCESS CONTROL

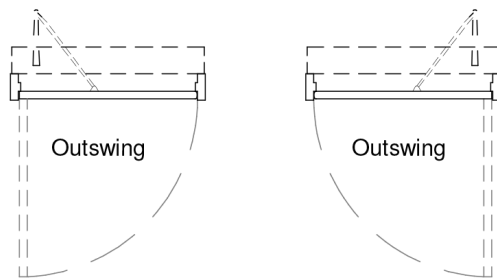

1 Horizontal Section

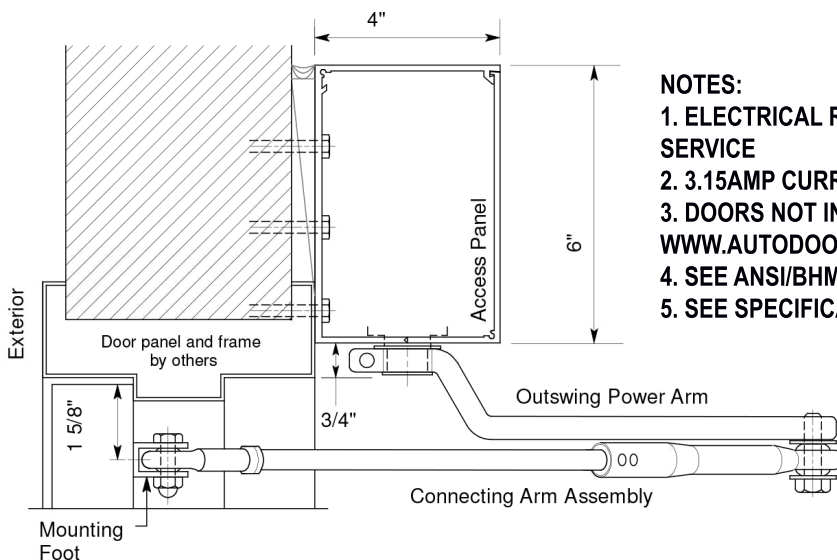

NOTES:

1. ELECTRICAL REQUIREMENTS: 120VAC, 60HZ, SINGLE PHASE, 15 AMP
SERVICE
2. 3.15AMP CURRENT DRAW
3. DOORS NOT INCLUDED. DOORS ARE AVAILABLE AT
WWW.AUTODOORANDHARDWARE.COM
4. SEE ANSI/BHMA A156.19 FOR DETAILED REQUIREMENTS
5. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION

2 Vertical Section