AUTOMATIC DOOR AND HARDWARE

Exterior Commercial Metal Door Quotation Form

Complete the form and submit to custsvc@autodoorandhardware.com. A formal quotation will be sent back to you within 24 hours during normal business hours.

Company	Phone	Commercial or Residential (Specify)
Contact Name	Mark #	
Email		Delivery Address

Fire Label: ☐ No Label ☐ 45 Minutes ☐ 60 Minutes ☐ 90 Minutes ☐ 3 Hours



(A) Frame Jamb Depth
(B) Throat

Throat is 1" less than jamb depth.
(B) = (A) - 1"

1. Frame Jamb Depth



- ☐ 5-3/4" Jamb Depth (Most Common)
- ☐ 4-3/4" Jamb Depth
- ☐ 7-3/4" Jamb Depth
- ☐ 8-1/4" Jamb Depth
- ☐ OTHER

_____ INCHES (A)

Exterior door frame is designed for installation on an exterior wall. Door frame is designed to butt against the wall.

2. Frame Construction

- ☐ Knock Down Frame (Frame ships in 3 pieces: head, jamb stile, & lock stile. Minor assembly required)
- ☐ Welded Frame (Frame ship welded together)

3. Frame Anchor Type

Existing Walls That Are Already Built & Erected

- ☐ Multipurpose Anchors For Wood Stud or Metal Stud Walls
- ☐ Punch & Dimple Anhors With Masonry Sleeve Bolts For Brick, CMU, Block Wall or Masonry Wall

New Walls That Have Not Been Built or Erected Yet

- ☐ Masonry Wire Anchors For Brick, CMU, Block Wall or Masonry Wall
- ☐ OTHER Anchor Type (List Below)

_____

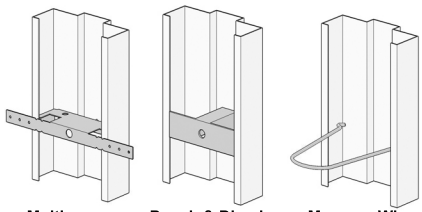

Multipurpose | Punch & Dimple | Masonry Wire

4. Rough Opening

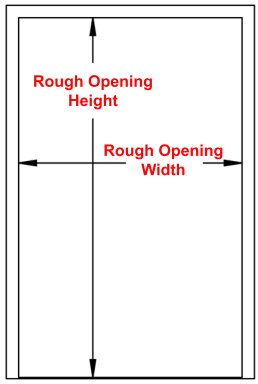

- ☐ 40-1/2" Width x 82-1/4" Height
- ☐ 40-1/2" Width x 86-1/4" Height
- ☐ 46-1/2" Width x 82-1/4" Height
- ☐ 46-1/2" Width x 86-1/4" Height
- ☐ 52-1/2" Width x 82-1/4" Height
- ☐ 52-1/2" Width x 86-1/4" Height
- ☐ 76-1/2" Width x 82-1/4" Height (Door Pair)
- ☐ 76-1/2" Width x 86-1/4" Height (Door Pair)
- ☐ 88-1/2" Width x 82-1/4" Height (Door Pair)
- ☐ 88-1/2" Width x 86-1/4" Height (Door Pair)
- ☐ 100-1/2" Width x 82-1/4" Height (Door Pair)
- ☐ 100-1/2" Width x 86-1/4" Height (Door Pair)
- ☐ OTHER _____ INCHES (WIDTH)

_____ INCHES (HEIGHT)

5. GLASS

- ☐ 6" x 27" 1/4" Tempered Clear Glass (Non Fire Rated)
- ☐ 7" x 22" 1/4" Tempered Clear Glass (Non Fire Rated)
- ☐ 12" x 12" 1/4" Tempered Clear Glass (Non Fire Rated)
- ☐ 24" x 24" 1/4" Tempered Clear Glass (Non Fire Rated)
- ☐ 24" x 30" 1/4" Tempered Clear Glass (Non Fire Rated)
- ☐ 24" x 64" 1/4" Tempered Clear Glass (Non Fire Rated)
- ☐ 6" x 27" 1/4" Laminated Wire Glass (Fire Rated)
- ☐ 7" x 22" 1/4" Laminated Wire Glass (Fire Rated)
- ☐ 12" x 12" 1/4" Laminated Wire Glass (Fire Rated)
- ☐ OTHER

5a. GLASS LOCATION

A_____" B_____"

C_____" D_____"

6. VENTED LOUVER

- ☐ 12" x 12" Fixed Blade Door Louver
- ☐ 18" x 12" Fixed Blade Door Louver
- ☐ 18" x 18" Fixed Blade Door Louver
- ☐ 18" x 24" Fixed Blade Door Louver
- ☐ 18" x 64" Fixed Blade Door Louver
- ☐ 20" x 60" Fixed Blade Door Louver
- ☐ 24" x 12" Fixed Blade Door Louver
- ☐ 24" x 18" Fixed Blade Door Louver
- ☐ 24" x 24" Fixed Blade Door Louver
- ☐ 24" x 36" Fixed Blade Door Louver
- ☐ 24" x 60" Fixed Blade Door Louver
- ☐ 24" x 64" Fixed Blade Door Louver
- ☐ OTHER

6a. LOUVER LOCATION

A_____" B_____"

C_____" D_____"

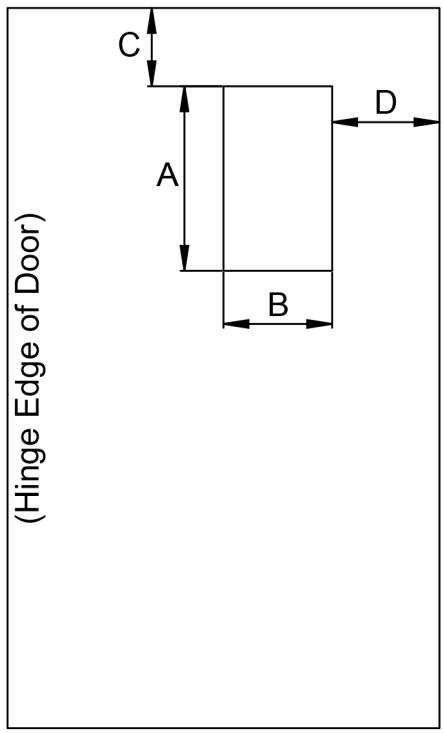

7. HANDING

SINGLE DOORS

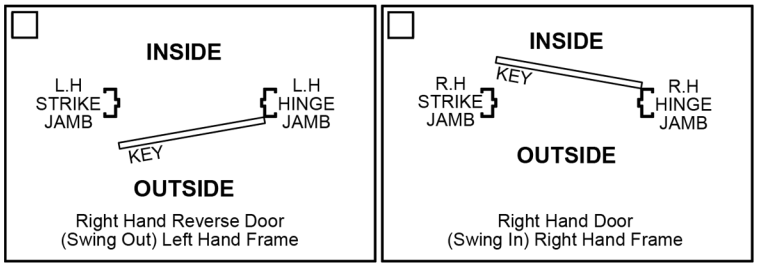

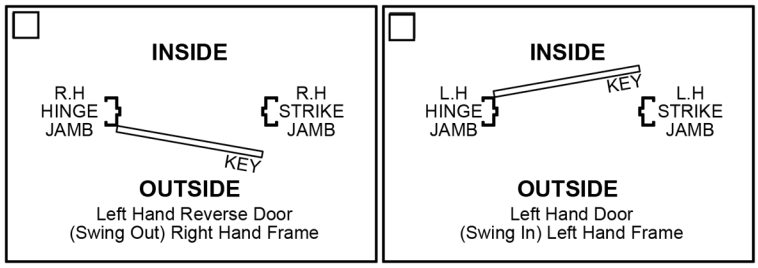

DOUBLE DOORS

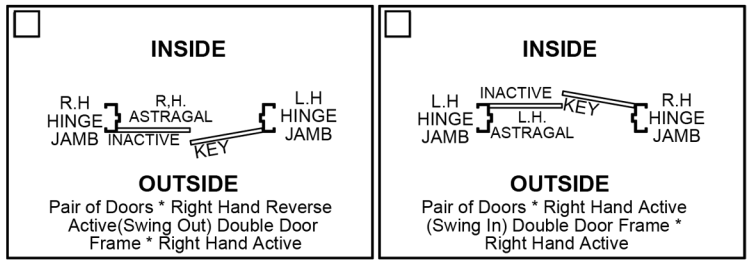

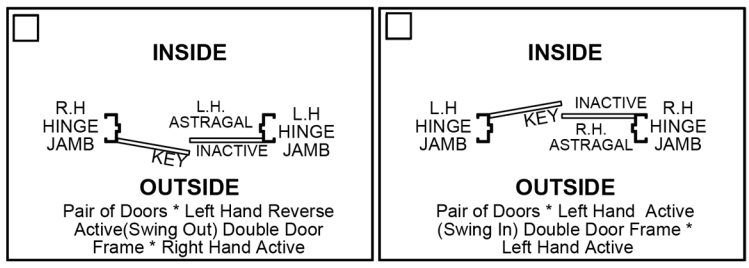

8. HARDWARE

8A. Hanging

- ☐ Balll Bearing Hinges
- ☐ Plain Bearing Hinges
- ☐ Spring Hinges

8B. Closing/Opening

- ☐ Heavy Duty Door Closer
- ☐ Low Energy Automatic Door Operator
- ☐ Kick Down Door Holder
- ☐ Chain Door Holder
- ☐ Door Coordinator (Double Doors Only)

8C. Locking

- ☐ Lever Handle (Entrance, Passage, Storeroom, or Privacy)
- ☐ Knob Handle (Entrance, Passage, Storeroom, or Privacy)
- ☐ Exit Device (No Outside Handle)
- ☐ Exit Device With Outside Handle (Entrance, Passage, or Storeroom)
- ☐ Push Plate & Pull Handle
- ☐ Single Cylinder Deadbolt (Thumbturn on Inside, Keyed on Oustide)
- ☐ Double Cylnder Deadbolt (Keyed On Both Sides)

8D. Protection

- ☐ Kick Plate
- ☐ Mop Plate
- ☐ Armor Plate
- ☐ Cart Bar
- ☐ Guard Post With Rubber Bumpers
- ☐ Floor Pedestal Door Stop
- ☐ Floor Dome Door Stop

8E. Sealing

- ☐ Fire Rated Screw Mount Door Frame Seal
- ☐ Fire Rated Adhesive Door Seal
- ☐ Automatic Door Bottom
- ☐ 5” Wide x 1/2” Tall ADA Door Threshold
- ☐ Overhead Rain Drip
- ☐ Bottom Brush Door Sweep
- ☐ Bottom Vinyl Door Sweep
- ☐ Astragal

8F. Other

- ☐ Specify Here:

9. Special Notes

All metal doors are 18 gauge steel with a full body polystyrene core. Door frames are 16 gauge steel. Other door gauges, door cores, and frame gauges available. All metal doors ship pallet crated to shipping location with a lift gate service. All metal doors are manufactured per order and are non-returnable. Once in production the order cannot be cancelled.