

## Maverick Pro Automatic Sliding Door



### The Most Comprehensive Automated Entrance Solution on the Market

The Maverick Pro Automatic Sliding door system features an easy to install complete package meant to get your entrance up and running as soon as possible. Pre glazed and assembled doors make installation a quick and hassle free process. The Maverick Pro offers the latest advances in the automatic door industry with standard features including monitored safety sensors, full length interlocking door panels and monitored battery backup.

- Heavy Duty 4-5/16" Wide x 8" Tall rounded header provides structure and aesthetically pleasing design
- Designed for ease of installation, pre assembled and glazed doors eliminate any extra steps during installation
- Monitored battery back up included in standard package to ensure door operation when power fails
- Full breakout design – all door panels will swing out in emergency
- Full length interlocking door panels for increased security
- System monitored directional motion sensors and safety curtains ensuring safe, efficient, and smooth door operation
- Integrated passive brake absorbs the opening force of the door



### Custom Applications & Options

- Custom sized transoms
- Additional horizontal rails for a more aesthetic look
- 1/4" or 1" glass preinstalled in Doors
- Custom sized doors to fit your opening

### Additional Benefits

- Electronic display with built in diagnostics and remote
- Track cleaning system
- Clear or Dark Bronze Anodized Finish
- Header, operator, control and hardware
- Monitored battery backup system
- System Monitored directional motion sensors and safety curtains
- Mortise Hook Bolt Lock with keyed exterior and thumbturn interior
- Dual safety beams
- ANSI decals
- Installation/Instruction Manual

# MAVERICK

## AUTOMATIC DOOR SYSTEMS

### Installation and Operation



#### Electrical Requirements

Power Supply: 120 VAC @ 60 Hz  
Avg. Absorbed Power: 50 W  
Motor Voltage: 30 VDC  
Battery Backup: 12 VDC, 1.2 A/h



#### Full Length Interlocks

Full length interlocks offer maximum door security




#### Advanced Weather Seal Design

Complete weather seal when doors are closed to form a real air infiltration barrier.





#### Self Cleaning Track


Exclusive self cleaning roller carriage with cleaning brushes that keep the track free of dust and debris for continuous smooth and silent operation.



Type SX-SO (SO-SX Opposite)

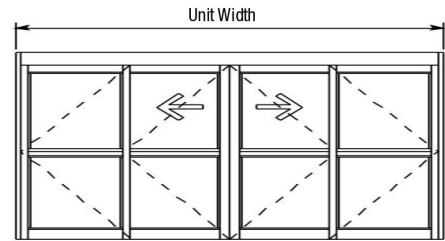

Type SO-SX-SX-SO



Model	Package Size	Required Rough Opening Width	Maximum Slide Opening	Breakout Opening
Single Slide	7'-0"	84-1/2"	2'-11"	6'-2"
	8'-0"	96-1/2"	3'-5"	7'-2"
	9'-0"	108-1/2"	3'-11"	8'-2"
Bi-Part	9'-0"	108-1/2"	3'-6"	7'-9"
	10'-0"	120-1/2"	4'-0"	8'-9"
	12'-0"	144-1/2"	5'-0"	10'-9"
	14'-0"	168-1/2"	6'-0"	12'-9"
	16'-0"	192-1/2"	7'-0"	14'-9"



# MAVERICK

## AUTOMATIC DOOR SYSTEMS